

## Product Technical Sheet

# Amore

## Electric Shower



### Product Codes

Amore - 8.5kW - Gloss Black	ASPAMO8GSBLK
Amore - 9.5kW - Gloss Black	ASPAMO9GSBLK
Amore - 8.5kW - Gloss White	ASPAMO8GSWHT
Amore - 9.5kW - Gloss White	ASPAMO9GSWHT
Amore - 8.5kW - Brushed Steel	ASPAMO8BRSTL
Amore - 9.5kW - Brushed Steel	ASPAMO9BRSTL

### Installation

- Inlet connection: 15mm diameter
- Outlet connection: 1/2" BSP male thread

### Commissioning

- Simple 2 minute commissioning process

### End User

- Crisp white digital display with temperature read-out
- Sleek, contemporary cover
- Touch activated power selector, on/off button and temperature control dial
- 5 spray shower head with removable spray plate and 1.5m anti-twist hose
- Suitable for cold mains only
- 2 years parts and labour guarantee
- Efficient A energy rating



Gloss Black



Gloss White



Brushed Steel



# Amore

## Electric Shower

### Shower

Temperature stability	Stabilised
Power ratings	8.5kW, 9.5kW (at 240V)
Finish	Gloss Black, Gloss White, Brushed Steel
Controls	Touch activated power selector, on/off button and temperature control dial
Visual indicators	Power-on/low pressure indicator
Inlet Connection	15mm male compression
Water Entry Points	Top, bottom, side bottom, back (left hand side unit) Bottom, side bottom, back (right hand side unit)
Cable Entry Points	Top, bottom, side bottom, back (left hand side unit)
Outlet Connection	½" BSP
Plumbing System Compatibility	Cold mains only
Minimum Running Pressure/Flow	1 Bar @ 8 l/min
Maximum Static Pressure	10 Bar
Approvals, Complies with	BEAB, CE, UKCA, BSI Kitemark, KIWA Reg 4
Guarantee	2 years


\*Recommended minimum running pressure/flow for full performance 1 bar @8l/min

### Riser Rail Kit

Length	530mm
Diameter	22mm
Material	Stainless Steel
Finish	Rail & brackets
Hose	1.5m anti-twist double interlocked stainless steel - Black

### IMPORTANT MAINTENANCE NOTICE

Replacing specified Triton accessories for this Amore unit will aid optimum performance and maintain a valid guarantee

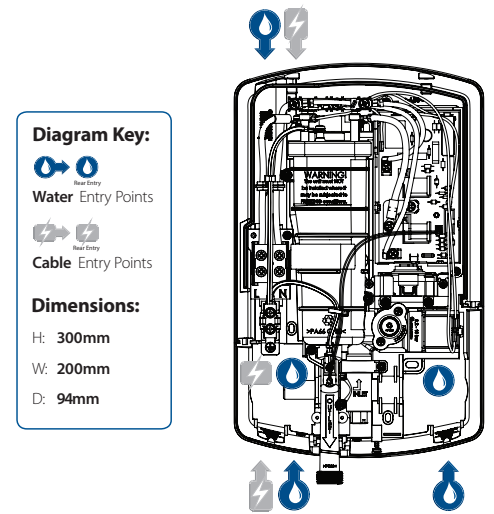

**Kian Shower Riser Rail**  
(Available as a spare part)



**1.5m Anti-twist Hose - Chrome**  
REHOSE150C



**8000 | DuraFlow™ - 5 Spray Chrome**  
TSHE8RCCHR

Contact our specification team

Call: 02476 324 776 | Email: [specification@tritonshowers.co.uk](mailto:specification@tritonshowers.co.uk) | Web: [www.tritonshowers.co.uk/specifiers](http://www.tritonshowers.co.uk/specifiers)